


New Product Release

CALRAD Electronics

For technical assistance call: 323-465-2131

95-2035-IR IR Controlled 30 Watt Stereo Digital Amplifier


**'Perfect for Single Room
or Multizone Audio
Applications'**

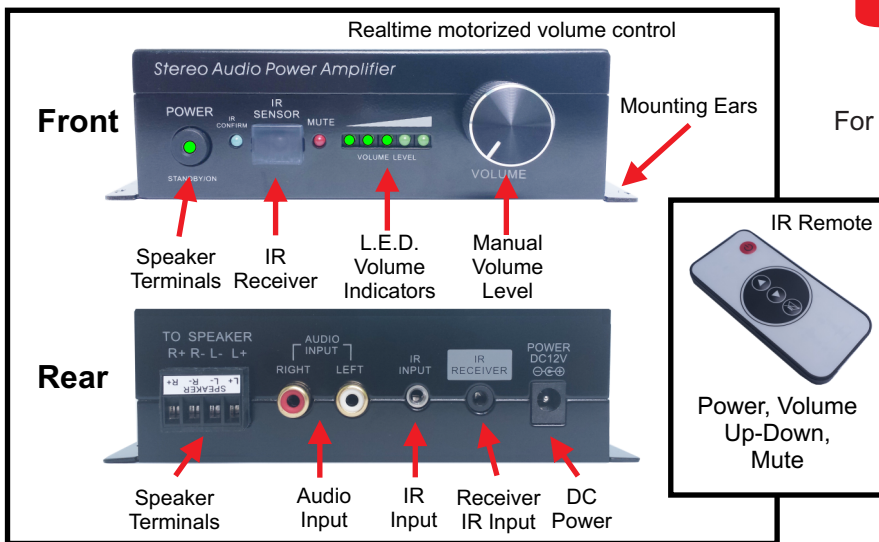

Description

The Calrad 95-2035-IR digital amplifier provides many solutions for residential and commercial single-multi zone audio applications. It's small compact size makes it perfect for behind displays, cabinets and equipment racks where space is limited. Perfect for use in offices, classrooms or conference rooms, etc. Optional external IR receiver control or direct IR input for connecting to IR repeater/distribution systems or 3rd party control/automation products. High efficiency class 'D' technology with low power consumption circuitry for distortion free reliable audio reproduction. IR controlled power, volume up, volume down, mute. Visual L.E.D. indicators for power, IR status, mute and audio output level. The volume control rotates manually or moves automatically when using the IR remote control.

Typical Hookup

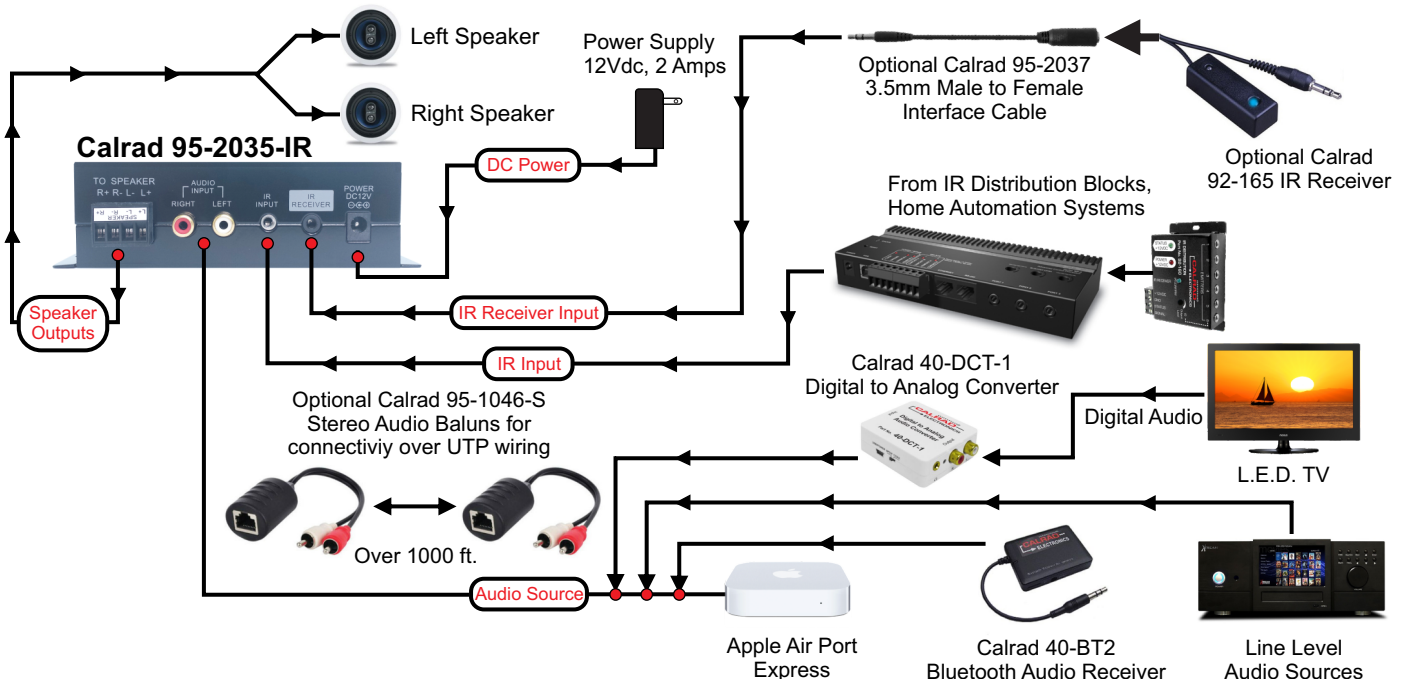

Specifications

Connectors: **Audio**: Stereo RCA Jacks, **IR Inputs**: 3.5mm jacks, **DC Power**: 2.1mm coax jack
 Line input impedance: 10K
 Amplifier type: Stereo Class-D
 Output Power: 15 Watts per channel @ 4 ohms
 Stereo Channel Separation: >80dB from 20Hz to 20KHz
 THD: 0.06%
 Speaker protection: Output load, short circuit
 Power Supply: 12Vdc, 2 Amps
 Detachable speaker terminal block (4 Position): 12-24 Gauge cable
 Size: L-4" x W-5" x H-1.6", Color: Black

Package Contents

- 1 x 95-2035-IR
- 1 x IR Remote
- 1 x Power Supply
- 1 x Owners Manual

1/2" Mounting
Screws Included



Drawing No. 95-2035-IR-3042015-WB

www.calrad.com