

Anti-Vandal Pushbutton, Single Pole




Features

- .748" (19mm) bushing diameter



NTE Type No.	Circuitry	Action		Actuator	Diag No.
54-377	SPST-NO	OFF	(ON)	Stainless Steel, Flat	S76b
54-378	SPST-NO	OFF	(ON)	Stainless Steel, Curved	S76c
NEW 54-378E	SPST-NO	OFF	(ON)	Stainless Steel, Curved	S76c

SPECIAL NOTE: () = Momentary Function

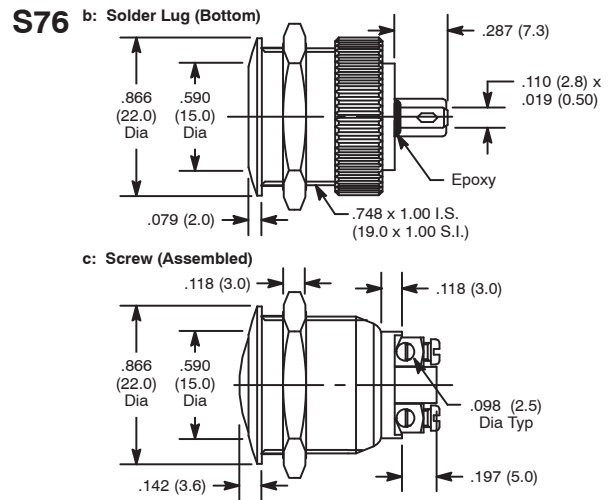

Specifications

Contact Rating: 2A 48VDC max. (resistive load)
Initial Contact Resistance: 10 Milliohms (max.) at 1A, 2V
Insulation Resistance: 100 Megohms (min.) at 500VDC
Dielectric Strength: 2000V RMS (min.)
Temperature Rating: -4° to +131°F (-20° to +55°C)
Electrical Life: 10,000 cycles min. at full load
Mechanical Life: 1,000,000 cycles min.
Terminal Type: Refer to Diag No. in Table
Mounting Hole: .756 (19.2)

Anti-Vandal Pushbutton, Single Pole



Features


- .866" (22mm) bushing diameter



NTE Type No.	Circuitry	Action		Actuator	Diag No.
54-379	SPST-NO	OFF	(ON)	Stainless Steel, Curved	S77b

SPECIAL NOTE: () = Momentary Function

S77 b: Solder Lug (Bottom)

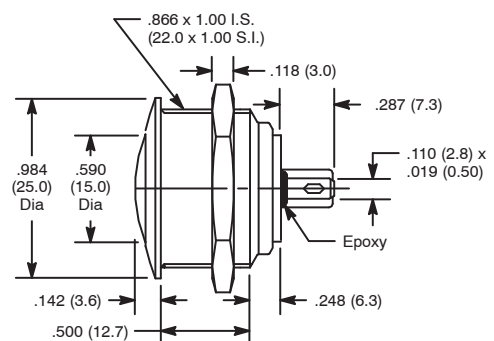

Specifications

Contact Rating: 2A 48VDC max. (resistive load)
Initial Contact Resistance: 10 Milliohms (max.) at 1A, 2V
Insulation Resistance: 100 Megohms (min.) at 500VDC
Dielectric Strength: 2000V RMS (min.)
Temperature Rating: -4° to +131°F (-20° to +55°C)
Electrical Life: 10,000 cycles min. at full load
Mechanical Life: 1,000,000 cycles min.
Terminal Type: Solder Lug/Quick-Connect
Mounting Hole: .756 (19.2)