



# METAL HOOD & HARDWARE

## METAL HOODS W/ GROMMETS

- Includes Necessary Hardware for Assembly
- Rubber Grommets with various inside diameters for StrainRelief
- Packaged w/ 3 to 5 Grommets for each Hood
- Die Cast Metal Hood
- Provides EMI Shielding

### Straight

**DM-(XX)C/GR**

XX= Pins: 9, 15, 25, 37, 50



**DM-50C/GR**

## GROMMETS FOR METAL HOODS

- Flexible, Rubber Material
- Each Set with Different Inside Diameter



Part #	Use On	O.D. (MM)	I.D. (mm)				
			1	2	3	4	5
<b>DM-GR-9, 15</b>	DM-9 or 15C/GR	10	5	6	7	8	9
<b>DM-GR-25</b>	DM-25C/GR	12	6	7	8	9	10
<b>DM-GR-37, 50</b>	DM-37 or 50C/GR	16	8.5	10	11.5	13	14.5

## HARDWARE FOR HOODS

### H-SET-25C

Includes one set cord strain reliver wire holder, Saddle Washer, Shoulder Screw, 12mm 4/40 screw, 7.5mm 4/40 screw and nut. For DP25C



### H-SET-25C/S

Includes two each Saddle Washer, Shoulder screw, 12mm 4/40 screw, nut, and one plastic strain relief screw. For DP-25C/S



## FOR AUI CABLE

### HSL-15 Slide Latch

**HSL-P** Slide Lock Post Kit, Include 2 each Locking Post and 2 flat washers, 2 split washer



## METAL HOODS WITH GROMMETS

- Includes Necessary Hardware for Assembly
- Rubber Grommets with Various Inside Diameters for StrainRelief
- Packaged with 3 to 5 Grommets for Each Hood
- Die Cast Metal Hood
- Provides EMI Shielding

### Right Angle

**DM-(XX)CR/GR**

XX= Pins: 9, 15, 25.



**DM-15CR/GR**

## DUST COVER FOR D-SUB

- Flexible Translucent Plastic
- Protects Connector from Dust and/or Moisture

**Male DST-D(XX)P**



**DST-D09P**

**Female DST-D(XX)S**



**DST-D09S**

XX= Pins: 9, 15, 25, 37.

## DUST COVERS FOR CENTRONIC

- Flexible Translucent Plastic
- Protects Connector from Dust and/or Moisture

**Male DST-57(XX)P**



**DST-5736P**

**Female DST-57(XX)S**



**DST-5714S**

XX= Pins: 14, 36, 50.

## SCREW LOCK KIT


**HFS-1** Include 1 short 4/40 Hex Locking Screw thread length 7.5mm, and 2 Flat washer, 1 split washer, and 1 nut.

**HFS-1/SET** Include 2 short 4/40 Hex Locking Screw thread length 7.5mm, and 4 Flat washer, 2 split washer, and 2 nut.

**HFS-2** Include 1 Hex Locking Screw thread length 12 mm, and 2 Flat washer, 1 split washer, and 1 nut.

**HFS-2/SET** Include two 4/40 Hex Locking Screw thread length 12 mm, and 4 Flat washer, 2 split washer, and 2 nut.

**HFS-3/SET** Include 2 each Hex Locking Screw thread length 7.5mm, 4 Flat washer, 2 split washer, and 2 nut.

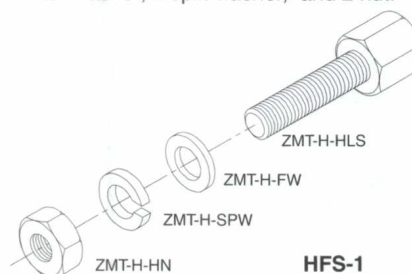

**HFS-1**