


SWITCHES STANDARD TOGGLE

HEAVY DUTY BAT HANDLE TOGGLE SWITCHES - DPST & DPDT



Mounting Hole: 0.500"

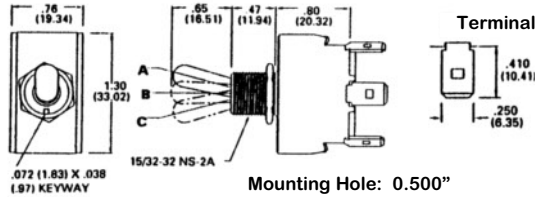


SPECIFICATIONS:

Current Rating:	20A @125V AC, 10A @ 277V AC 1-1/2 HP @ 125-250V AC
Initial Contact Resistance:	50 Meg ohm (Max.)
Insulation Resistance:	100 Meg ohm (Min.) @ 500V DC
Dielectric Strength:	1000V AC 50/60 Hz for 1 minute
Contact Material:	Brass - Bright Nickel Plate
Terminal Material:	Brass
Terminal Type:	.250" Quick Connect

Part No.	Type	Action			Actuator
30-345	DPST	ON	-	OFF	Metal
30-320	DPDT	ON	-	ON	Metal
30-325	DPDT	ON	OFF	ON	Metal
30-330	DPDT	(ON)	OFF	(ON)	

NOTE: () = Momentary

HEAVY DUTY BAT HANDLE TOGGLE SWITCHES - DPST & DPDT

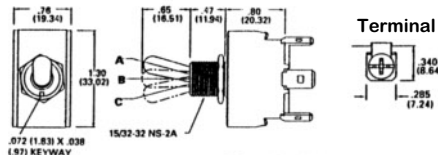

Mounting Hole: 0.500"




SPECIFICATIONS:

Current Rating:	20A @125V AC, 10A @ 277V AC 1-1/2 HP @ 125-250V AC
Initial Contact Resistance:	50 Meg ohm (Max.)
Insulation Resistance:	100 Meg ohm (Min.) @ 500V DC
Dielectric Strength:	1000V AC 50/60 Hz for 1 minute
Contact Material:	Brass - Bright Nickel Plate
Terminal Material:	Brass
Terminal Type:	Screw

Part No.	Type	Action			Actuator
30-312	DPST	ON	-	OFF	Metal
30-365	DPST	ON	-	(OFF)	Metal
30-046	DPDT	ON	-	ON	Metal
30-048	DPDT	ON	OFF	ON	Metal
30-051	DPDT	ON	OFF	(ON)	Metal
30-050	DPDT	(ON)	OFF	(ON)	Metal

NOTE: () = Momentary

HEAVY DUTY BAT HANDLE TOGGLE SWITCHES - DPST & DPDT

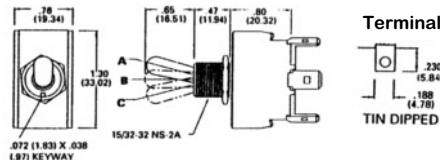

Mounting Hole: 0.500"




SPECIFICATIONS:

Current Rating:	20A @125V AC, 10A @ 277V AC 1-1/2 HP @ 125/250V AC
Initial Contact Resistance:	50 Meg ohm (Max.)
Insulation Resistance:	100 Meg ohm (Min.) @ 500V DC
Dielectric Strength:	1000V AC 50/60 Hz for 1 minute
Contact Material:	Brass - Bright Nickel Plate
Terminal Material:	Brass
Terminal Type:	Solder - Tin Dipped

Part No.	Type	Action			Actuator
30-012	DPST	ON	-	OFF	Metal
30-052	DPDT	ON	-	ON	Metal
30-049	DPDT	ON	OFF	ON	Metal

NOTE: () = Momentary

HEAVY DUTY BAT HANDLE TOGGLE SWITCHES - 3PST & 3PDT

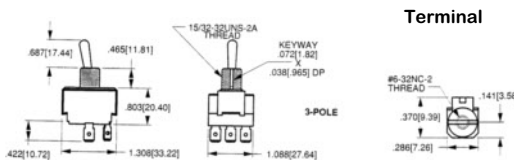

Mounting Hole: 0.500"



SPECIFICATIONS:

Current Rating:	17A @125V AC, 12A @ 250V AC 1-1/2 HP 250V AC 1, 2 or 3 Phase
Insulation Resistance:	100 Meg ohms
Dielectric Strength:	1000V (min.)
Base Material:	Phenolic
Actuator & Bushing Material:	Brass/Nickel Plate
Terminal Type:	Screw (#6-32 NC-2 Thread)

Part No.	Type	Action			Actuator
30-10239	3PST	ON	-	OFF	Metal
30-10240	3PDT	ON	OFF	ON	Metal
30-10241	3PDT	ON	-	ON	Metal