

PANEL CUTOUT


NOTES:

MECHANICAL:

1. MATERIAL: ABS UL 94V-0
2. SPRING WIRE: PHOSPHOR BRONZE, 50  $\mu$ IN AU OVER 100  $\mu$ IN NI UNDERCOAT
3. TEMPERATURE: -40°C - +68°C (-40°F - +154°F)
4. HUMIDITY: 10% - 90% RH
5. DURABILITY: 750 MATING CYCLES MIN.

ELECTRICAL:

1. CURRENT RATING: 1.5 A
2. INSULATION RESISTANCE: 500 MOHM
3. CONTACT RESISTANCE: 20 MOHM
4. DC RESISTANCE: 0.1 OHM
5. DIELECTRIC WITHSTANDING VOLTAGE: 1000 V

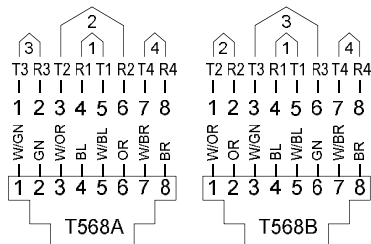

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS (INCHES) TOLERANCES (MM):		
	CLASS A	CLASS B
L<=3	±.05	±.1
3<L<=6	±.05	±.1
6<L<=16	±.1	±.15
16<L<=30	±.1	±.2
30<L<=120	±.15	±.3
120<L<=315	±.2	±.5

MATERIAL: AS NOTES  
MECHANICAL: AS NOTES  
ELECTRICAL: AS NOTES

**SIGNAMAX**<sup>TM</sup>  
CONNECTIVITY SYSTEMS

PROJECT ID SPCS - PD		FILE SPCS - PD.KIC.KRJ45-5S-BU	APRIL'08	16295 NW 13th Ave, Ste A, Miami, FL 33169, PH: (305) 944-7710, FX: (305) 949-4483, www.signamax.com					
PROCESS	INITIALS	NAME	DATE	TITLE KRJ45/5S-BU (UNSCREENED KEYSTONE INLINE COUPLER)					
DRAWN									
CHECK				SIZE A	CAGE CODE	DWG. NO.		REV A	
APPROVED									
				SCALE 2:1		UNIT MM (IN)	SHEET 1 OF 1		