


.....®  
**CALRAD**  
**ELECTRONICS**

819 N. Highland Ave.  
 Los Angeles, CA 90038

Tel (323) 465-2131, Fax (323) 465-3504  
 Visit us on the web at [www.calrad.com](http://www.calrad.com)

**Part No. 40-1080**  
**PC-Laptop Digital**  
**Wireless Audio System**

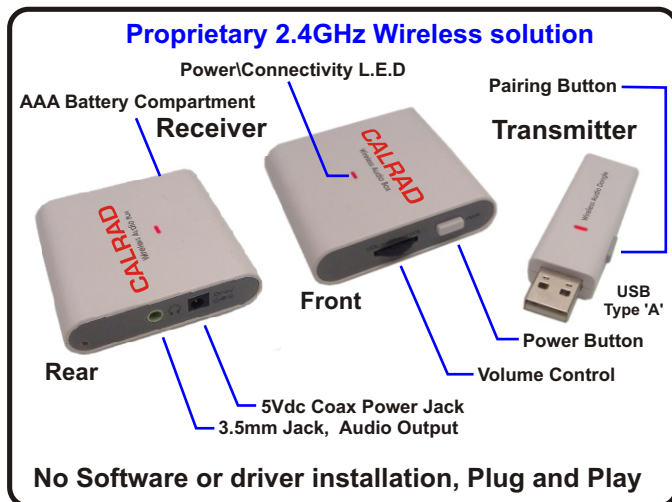

Calrad's new compact Digital Wireless audio system enables you to wirelessly transmit music from your PC or Laptop computer to your home stereo receiver or use the receiver with a standard pair of headphones for portable private listening. Simply connect the wireless USB audio transmitter dongle to your PC or Notebook for transmitting audio, no drivers or software to setup. Volume controlled through your computer or manually on the receiver. Power the receiver using a single 'AAA' battery (Supplied) or an optional 5Vdc power adapter. When using battery power, the receiver will automatically enter power saving mode when no audio is present after five minutes. Working range of up to over 50 ft. The Receiver and transmitter L.E.D. is blinking when powered on, lights up solid when communication is established and data transfer is in progress between the transmitter and receiver. Simple Transmitter and Receiver pairing for reliable signal transmission.

**Package Contents**

- Wireless Audio Dongle x1
- Wireless Audio Box x1
- User's Manual x1
- AAA Battery x1
- Mobile Strap x1
- Power Adapter (Optional) x1



**Accessories**



**3.5mm male to female Stereo RCA adapter cable Included**




**40-1080RPS Receiver external power supply (Optional)**

**Play and Select Music Here**



**PC-Laptop**

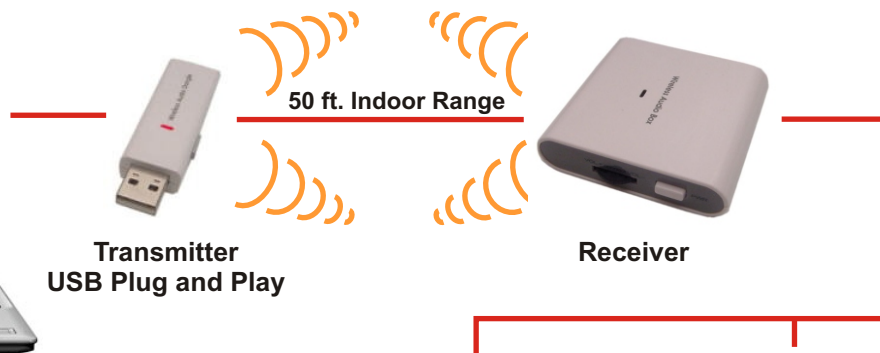

**Stereo Receiver**



**Stereo Headphones**

**Listen to Music Here**

**Specifications:**

- Supports:** Windows® 2000, XP and Vista™, Mac OS X v10.x or higher
- RF Band:** 2.4 GHz
- RF data rate:** Up to 2 Mbps, GFSK modulation
- Operational Range:** Up to 150 ft. outdoor open air transmission
- Audio Output:** 2 channel Audio Out
- Sample rate:** 48KHz with 16-bit downstream
- Receiver Audio Output:** 3.5mm female stereo audio jack
- Receiver Power:** Input: AC 100-240V; Output: DC 5V /1A (Not Included), AAA 1.5V battery x 1 (Included)
- Size:** Transmitter, L- 2.09", W-.752", H-.398", Receiver L-2.17", W-2.29", H-.56"
- Color:** White