


CALRAD[®] Electronics

For technical assistance call: **323-465-2131**
www.calrad.com

INTEGRATOR SERIES


40-999-HS 4 x 1, 4K-1080P IR-Manual HDMI Switcher Brochure & Instruction Sheet

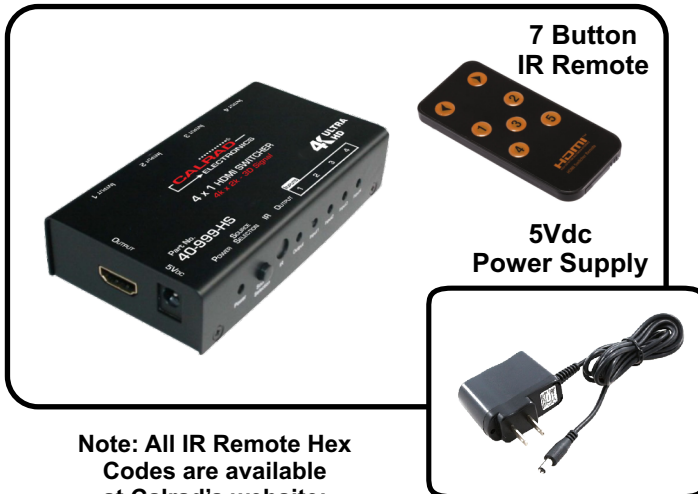

Note: All IR Remote Hex Codes are available at Calrad's website: www.calrad.com

FEATURES:

- Select one of 4 different HDMI signal input sources and switch to 1 HDMI display
- Manual or IR remote control to select input signals.
- Supports 30/36bit deep color display
- Supports High Definition Audio : Dolby TrueHD, DTS-HD Master Audio
- Auto Signal Enhancement circuitry can improve signal quality after long distance transmission
- Supports resolutions up to 4K
- Supports 3D video format
- Requires external 5Vdc power supply, (Included)

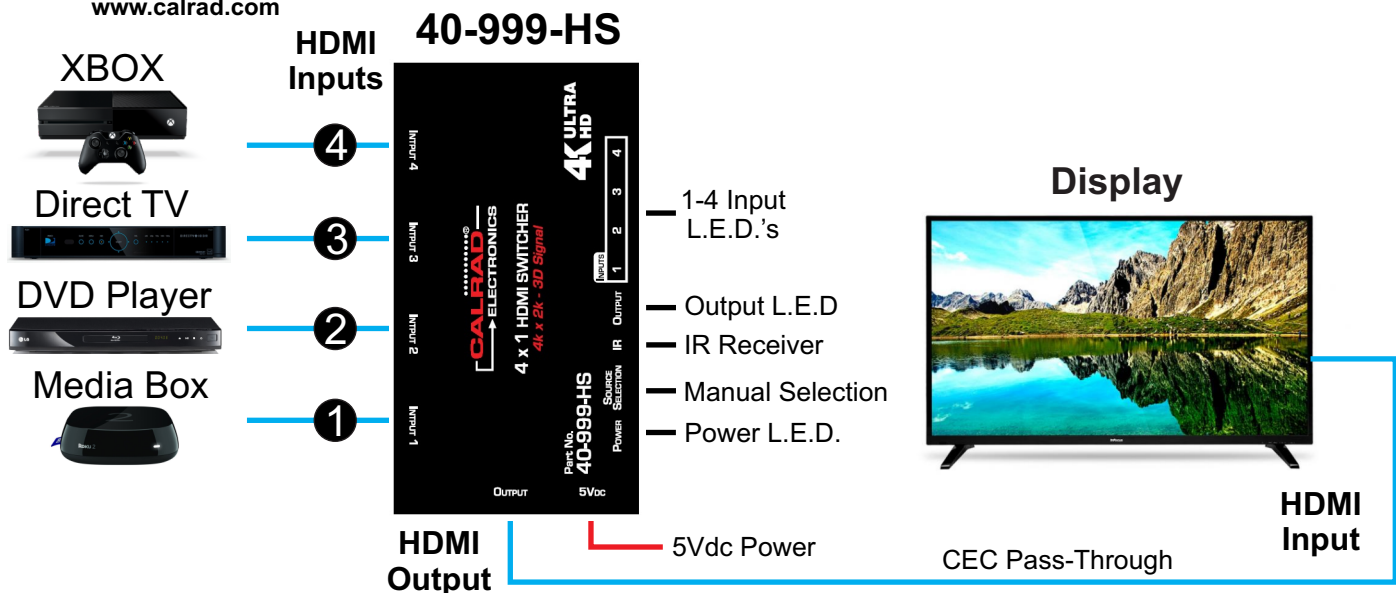

SPECIFICATIONS:

- HDTV Resolutions: 4K, 1080p, 1080i, 720p, 480p
- Bandwidth: 10.2 Gbps (Maximum)
- Input: 4 x HDMI, Output: 1 x HDMI
- HDMI HIGH SPEED • CEC Pass Through
- Supports: 3D, HDCP, 12bit per channel (36bit all channels) deep color
- Audio Support: LPCM 7.1, DTS Digital, Dolby Digital, DTS-HD and Dolby True HD
- IR Remote: 7 Button 38Khz, Battery CR2025 button cell
- Operating Temperature: -41 to +95 °F (-5 to +35 °C)
- Operating Humidity: 5 to 90% RH (No Condensation)
- DC Power: 5Vdc, 1Amp (included)
- Chassis: Metal
- Dimensions: L-4.53" x W-2.44" x H-0.98"
- Weight: 7.34oz

5 Picture In Picture

Pressing button number 5 on the remote activates the 'PIP'(Picture in Picture) source preview overlay menu which will display all sources in small video windows in the upper left portion of the screen. Use the left or right source selection buttons on the remote control to choose the video PIP inputs 1-4.

Please Note!

If you experience any technical issues with this product, please contact our technical support department: Hours M-F, 8:00am-4:00pm at 323-465-2131.

40-999-HS-11102016-WB