

Brochure\Instructions

.....
CALRAD
Electronics

For technical assistance
call: 323-465-2131



Part No. 72-144
Powered or Un-Powered
10 Port USB 2.0 HUB
with Connectivity L.E.D.'s

Provides full USB
Data connectivity and charging
phone & tablet devices capabilities


Features \ Technology For all the latest product information visit our website at: www.calrad.com

The Calrad 72-144 is a Powered or Un-powered 10 Port USB 2.0 HUB with 10 independent and isolated ports with over current protection, desktop or wall mounting capabilities. This Hi-Speed USB Desktop Hub can manage almost any digital warriors expanding collection of USB-enabled devices. It is perfect for low current charging of tablets, portable media devices, cellular phones, digital cameras and other mobile accessories including connectivity of keyboards, mice, Web cameras, flash drives, card readers and more. The compact and durable plastic case features the power and hub-to-PC ports on the side panel to help better organize connections and minimize cable clutter. Plug and Play with hot-swap capabilities, Windows and Mac compatibility, with data transfer speeds up to 480 Mbps. This unit can be used with or without the DC power supply. When the 72-144 is connected to a USB port for connectivity (PC-Mac, etc.) without the DC power supply the max current from the connected port is divided between any of the 1-10 ports used. When the DC power supply is used the total current is the sum of connected port and the DC power supply which is 1 Amp.

Typical Hookup

Connectivity

Plug and Play operation: Connect the 2 ft. USB Type 'A' to USB Type 'B' interface cable between your computer and the 10 port hub. Now connect your USB hardware to one of the 1-10 USB type 'A' ports. Please note! Some hardware may take a little longer than a few seconds to establish a connection. When using the USB ports for charging phones, tablets, etc. the external DC power supply should be used. If more than one device is used the charging current will be divided into the number of devices connected, if more than 2-3 devices are connected charging may not work for any of the devices.

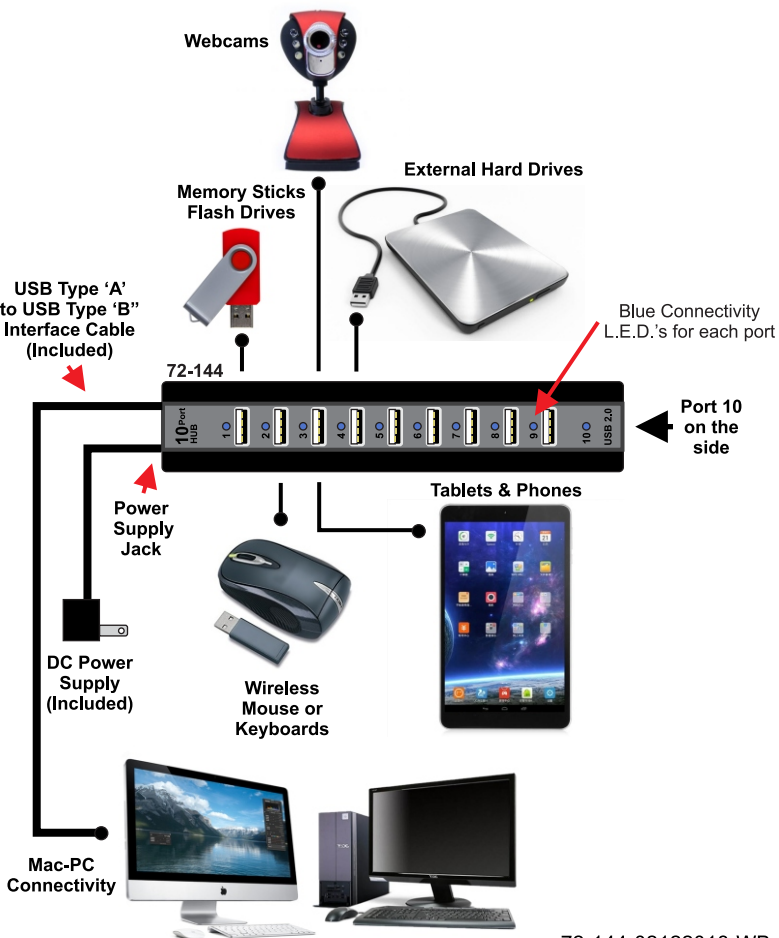

Package Contents

- 1 x 72-144
- 1 x 2ft. USB Type 'A' to USB Type 'B'
- 1 x 5Vdc, 1A DC Power Supply
- 1 x Instructions

Specifications

Certified OS: Windows 2000/XP/Vista/7 thru 10 or MAC OS 9 and above
Standards: USB 2.0, USB 1.1, USB 1.0
USB 2.0 Type 'B' Port: 1 x for (Mac,PC, etc. Connectivity)
USB Type 'A' to Type 'B' Interface Cable: 1 x 24" long, Black
Port Connectivity L.E.D. Indicators: 10 x Blue L.E.D.'s
Transfer Speeds: 1.5/12/480 Mbps
External DC Power: 1 x 5Vdc, 1Amp Power Supply
Size: L-7.5" x W-1.48" x H-0.85"
Wall Mounting: 2 x 1/4" Screw Hole Inserts, 3.5" hole spacing
Chassis Material: Plastic
Chassis Color: Black

72-144-02122018-WB